

EPI ELECTRIC











Rapid 2 RD

2-columns solution rectangular 3-stage

A cost-effective electric table frame with rapid assembly features. It comes as a all-in-a-box solution, ready to use in just a couple of minutes. This frame has basic sit-stand features and a clean sidebar design with no visual screws.




Technical Specification

 Table top Width: 1200-2000 mm Depth: 700-900 mm	 Stroke 650 mm	 Large tube down Available with large tube down	 Load 60 kg/column
 Velocity 32-40 mm/second	 Height 585-1235 mm excl. feet and table top	 Tube dimensions 80x60, 70x50, 60x40 mm	 Noise level 38-43 dB
 Available electronics iDrive	 Standard in <input type="checkbox"/> White <input type="checkbox"/> Silver		



Delivered all in one box.

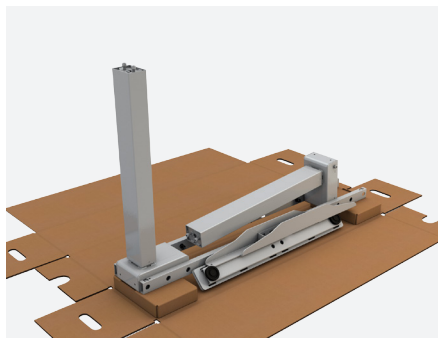

Easy to assemble, it only takes a few minutes...



...to get the table ready to use.